

Pre-Insulated Tubing Bundles

Electric-Traced and Steam-Traced



Features

- Simplified field installation
- 1/8 to 3/4 in. and 6 to 12 mm seamless or welded tubing sizes
- 316 / 316L stainless steel, copper, and PFA tube materials

Contents

Swagelok® Bundled Tubing	2
Insulation Features	2
Jacket Material Specifications	2
Tubing Bundle Technical Data	3
Electric-Traced Bundled Tubing	4
Steam-Traced Bundled Tubing	7
Light Steam-Traced	7
Heavy Steam-Traced	7
Options and Accessories	9
Tubing Material and Size	12
Additional Products	12



Swagelok Bundled Tubing

Swagelok pre-insulated traced tubing bundles provide reliable process temperature maintenance in a variety of analytical and process instrumentation applications, including impulse lines, sample lines, and process lines. It is used to connect process lines to pressure transmitters and analyzers. The rugged elastomeric jacket offers excellent resistance to abrasion and many chemicals.

Swagelok pre-insulated tubing bundles provide an economical choice compared to field tracing and insulating. The parallel configuration—process and tracer lines are parallel inside the bundle—allows all tubes to bend together in as little as an 8 in. (20.3 cm) radius in tubing sizes up to 3/4 in. or 12 mm, so the bundle is easier to route and connect in the field than cabled bundles.

Choose from light steam-traced, heavy steam-traced, and electric-traced bundles for freeze protection, viscosity control, and process temperature maintenance.

Insulation Features

- Water soluble chlorides less than 100 ppm
- Absorption-resistant fibrous glass insulation
- Resists wicking

Jacket Material Specifications

PVC Jacket

This jacket material is an economical choice when ambient installation temperature is above -10°F (-23°C). It offers UV, corrosion, and abrasion resistance.

Urethane Jacket

This jacket material is a nonhalogenated thermoplastic urethane that can be installed in ambient temperatures as low as -40°F (-40°C). It also offers improved resistance to abrasion, aromatic hydrocarbons, and UV light.

Jacket Colors

The standard jacket color is black. Contact your authorized Swagelok sales and service representative for other available colors.

Jacket Properties	PVC	Urethane
Tensile strength, psi (bar)	2200 (151)	3800 (261)
Elongation	350 %	700 %
Hardness, Shore A	80	80
UL 94 flammability rating	V2	V2
UV resistance	750 h UL-1581	2000 h in accordance with QUV aging test

Tubing Bundle Technical Data

Fractional

Tube OD in.	Nominal Wall Thickness in.	PVC Jacket Temperature Ratings			Pressure Rating at -20 to 100°F (-28 to 37°C) ^④		Min Bend Radius in. (cm)	Support Centers ft (m)		Max Continuous Length ^⑤ ft (m)	
		Max Jacket Rating ^① °F (°C)	Min Ambient Service Rating ^② °F (°C)	Min Ambient Installation Rating ^③ °F (°C)	Seamless	Welded		Horiz	Vert	Seamless	Welded
Stainless Steel (ASTM A269, A213[®]) TP 316/316L											
1/8	0.035	220 (104)	-30 (-34)	-10 (-23)	10 900 (751)	—	8.00 (20.3)	6.00 (1.80)	15.0 (4.60)	900 (274)	—
1/4	0.035				5 100 (351)	4080 (281)				2200 (671)	2500 (762)
	0.049				7 500 (516)	—				1300 (396)	—
3/8	0.035				3 300 (227)	2640 (181)				1000 (305)	2500 (762)
	0.049				4 800 (330)	—				750 (229)	1000 (305)
1/2	0.035 ^⑦				2 600 (179)	2080 (143)				250 (76.2)	—
	0.049				3 700 (254)	2960 (203)				—	—
	0.065				5 100 (351)	—				—	—
3/4	0.049 ^⑦				2 400 (165)	—				—	—
Copper (ASTM B68, B68M, B75, UNS 12200)											
1/4	0.030	220 (104)	-30 (-34)	-10 (-23)	1 400 (96.4)	—	8.00 (20.3)	6.00 (1.80)	15.0 (4.60)	2600 (792)	—
3/8	0.032 ^⑦				900 (62.0)					2000 (610)	
1/2	0.035 ^⑦				800 (55.1)					1000 (305)	
	0.049				1 100 (75.7)					—	
3/4	0.049 ^⑦				700 (48.2)					500 (152)	
PFA											
1/4	0.030 ^⑧	220 (104)	-30 (-34)	-10 (-23)	155 (10.6)	—	8.00 (20.3)	6.00 (1.80)	15.0 (4.60)	1000 (305)	—
3/8					95 (6.5)						
1/2					97 (6.6)						

Metric

Tube OD mm	Nominal Wall Thickness mm	PVC Jacket Temperature Ratings			Pressure Rating at -28 to 37°C (-20 to 100°F) ^④		Min Bend Radius cm (in.)	Support Centers m (ft)		Max Continuous Length ^⑤ m (ft)		
		Max Jacket Rating ^① °C (°F)	Min Ambient Service Rating ^② °C (°F)	Min Ambient Installation Rating ^③ °C (°F)	Seamless	Welded		Horiz	Vert	Seamless	Welded	
												bar (psig)
Stainless Steel (ASTM A269, A213[®]) TP 316/316L												
6	1.0	104 (220)	-34 (-30)	-23 (-10)	420 (6095)	—	20.3 (8.00)	1.80 (6.00)	4.60 (15.0)	300 (984)	—	
8					310 (4499)					210 (688)		
10					240 (3483)					165 (541)		
					400 (5805)					150 (492)		
12					200 (2902)					160 (2322)		300 (984)
					330 (4789)					—		120 (393)
Copper (ASTM B68, B68M, B75, UNS 12200)												
6	1.0	104 (220)	-34 (-30)	-23 (-10)	94.0 (1364)	—	20.3 (8.00)	1.80 (6.00)	4.60 (15.0)	600 (1968)	—	
8					60.0 (870)					455 (1492)		
12					54.0 (783)					300 (984)		

① The bundle is designed so that the jacket surface temperature will not exceed 140°F (60°C) with a process temperature of 400°F (204°C), an ambient temperature of 80°F (26°C), and a 10 mph (16 km/h) wind. The maximum jacket rating for urethane is 250°F (121°C).

② -60°F (-51°C) urethane jacket.

③ -40°F (-40°C) urethane jacket.

④ For elevated pressure-temperature ratings, see Swagelok *Tubing Data*, MS-01-107.

⑤ Standard tolerance for continuous length tubing is ±5 %.

⑥ Nominal wall thickness, not minimum wall thickness. Seamless metric sizes also meet DIN 17458 test 1 class material 1.4401/1.4404.

⑦ **Not recommended for use with tube fittings in gas service.**

⑧ Not recommended for use with Swagelok groove cutter tool or PFA fittings due to minimum wall thickness.

Electric-Traced Bundled Tubing

A simple and economical choice for applications where electric tracing is preferred, Swagelok electric-traced bundled tubing maintains consistent temperatures in long, continuous lengths of impulse and sample lines for freeze protection, temperature maintenance, or viscosity control. The standard Raychem® self-regulating tracer lowers heat output as the bundle gets warmer. For more precise temperature control, an optional line-sensing thermostat is available.



Features

- Raychem self-regulating electric tracers
- Tinned copper braided shield
- Fluoropolymer tracer jacket
- ATEX, FM®, and CSA® approved tracer for use in hazardous areas
- Maintains process temperatures up to 250°F (121°C)
- One or two process tubes available as standard

Technical Data—Tracer Specifications

High-Temperature Tracers

High-temperature tracers are used to maintain process temperatures or for viscosity control up to 250°F (121°C). They are also used for freeze protection or if the tracers will be exposed to intermittent temperatures up to 420°F (215°C), such as during steam cleaning.

Low-Temperature Tracers

Low-temperature tracers are used for freeze protection or maintaining temperatures up to 100°F (37°C) and can be exposed to continuous process temperatures of 150°F (65°C).


Tracer Type	Tracer Code	Voltage V (ac)	Maximum Process Temperature °F (°C)	Maximum Intermittent Exposure Temperature ^① °F (°C)	Power W/ft (W/m)	T Rating	Approvals	
High-temperature	H1	120	250 (121)	420 (215)	5 (16)	T3	FM Class I, Div. 2, Groups A, B, C, D Class II ^② , Div. 2, Groups F, G Class III ^② CSA Class I, Div. 1 and 2, Groups A, B, C, D Class II, Div. 1 and 2, Groups E, F, G Class III ATEX Group II, Category 2G, EEx e II	
					10 (32)			T2D
					15 (49)	T3		
					20 (65)			T2C
	H2	240			5 (16)	T3		
					10 (32)			
Low-temperature	L1	120	150 (65)	185 (85)	5 (16)	T6	FM Class I, Div. 2, Groups A, B, C, D Class II, Div. 2, Groups F, G Class III CSA Class I, Div. 1 and 2, Groups A, B, C, D Class II, Div. 1 and 2, Groups E, F, G Class III UL Class I, Div. 2, Groups A, B, C, D Class II, Div. 2, Groups F, G ATEX Group II, Category 2G, EEx e II	
					8 (25)			
					10 (32)			
	L2	240			5 (16)			T6
					8 (26)			
					10 (32)			

① The temperature that the electric tracer can be exposed to for 1000 h during its lifetime.


② The entire system requires approval for FM compliance.

Electric-Traced Bundled Tubing

Dimensions and Weight



One Process Tube



Two Process Tubes

Bundle Description	Dimensions, in. (mm)		Nominal Weight lb/ft (kg/m)
	A	B	
One 1/4 in. process tube	1.10 (27.9)	1.00 (25.4)	0.3 (0.45)
One 3/8 in. process tube	1.30 (33.0)		0.4 (0.60)
One 1/2 in. process tube	1.40 (35.6)	1.10 (27.9)	0.5 (0.74)
Two 1/4 in. process tubes	1.30 (33.0)		0.4 (0.60)
Two 3/8 in. process tubes	1.50 (38.1)	1.20 (30.5)	0.6 (0.89)
Two 1/2 in. process tubes	1.70 (43.2)	1.40 (35.6)	0.8 (1.19)

Maximum Tracer Length Versus Circuit Breaker Rating

Example: Given a nominal tracer power output of 10 W/ft (32 W/m), a startup temperature of 0°F (-17°C), and a voltage of 120 V (ac) with a breaker size of 20 A, the maximum tracer length will be 130 ft (39.6 m).

To determine maximum tracer length in meters: $m = ft \times 0.3048$.


Nominal Tracer Power Output W/ft (W/m)	Startup Temperature °F (°C)	Circuit Breaker Voltage										
		120 V (ac)					240 V (ac)					
		Circuit Breaker Size										
		15 A	20 A	30 A	40 A	50 A	15 A	20 A	30 A	40 A	50 A	
Maximum Tracer Length, ft												
High-Temperature												
5 (16)	50 (10)	180	240	360	380	380	360	480	720	765	765	
	0 (-17)	160	215	325			320	425	640			
	-20 (-28)	155	210	315			305	410	615			
	-40 (-40)	150	200	305			295	390	590			
10 (32)	50 (10)	110	145	220	270	270	220	295	440	540	540	
	0 (-17)	95	130	195	265		195	260	390	520		
	-20 (-28)	95	125	190	255		185	245	370	495		
	-40 (-40)	90	120	180	245		175	235	355	475		
15 (49)	50 (10)	76	101	151	201	220	151	202	302	403	425	
	0 (-17)	66	88	133	176		132	177	265	353		
	-20 (-28)	63	84	126	168		210	126	168	252		336
	-40 (-40)	60	80	120	160		200	120	161	241		321
20 (65)	50 (10)	60	80	119	159	190	115	153	229	305	360	
	0 (-17)	55	73	109	145	182	104	139	208	277	347	
	-20 (-28)	53	71	106	141	176	101	134	201	268	335	
	-40 (-40)	51	69	103	137	171	97	130	195	259	324	
Low-Temperature												
5 (16)	50 (10)	230	270	270	270	270	460	540	540	540	540	
	0 (-17)	150	200				300	400				
	-20 (-28)	130	175				260	260				345
8 (25)	50 (10)	150	200	210	210	210	295	390	420	420	420	
	0 (-17)	105	140				195	260	390			
	-20 (-28)	95	125				185	170	230			340
10 (32)	50 (10)	115	150	180	180	180	230	305	360	360	360	
	0 (-17)	70	95	145			150	200	300			
	-20 (-28)	60	85	125			135	180	270			

Electric-Traced Bundled Tubing

Ordering Number Reference

This ordering information is for reference only. To order, contact your authorized Swagelok representative.

See page 3 for available process tubing sizes and page 4 for available electric tracers.

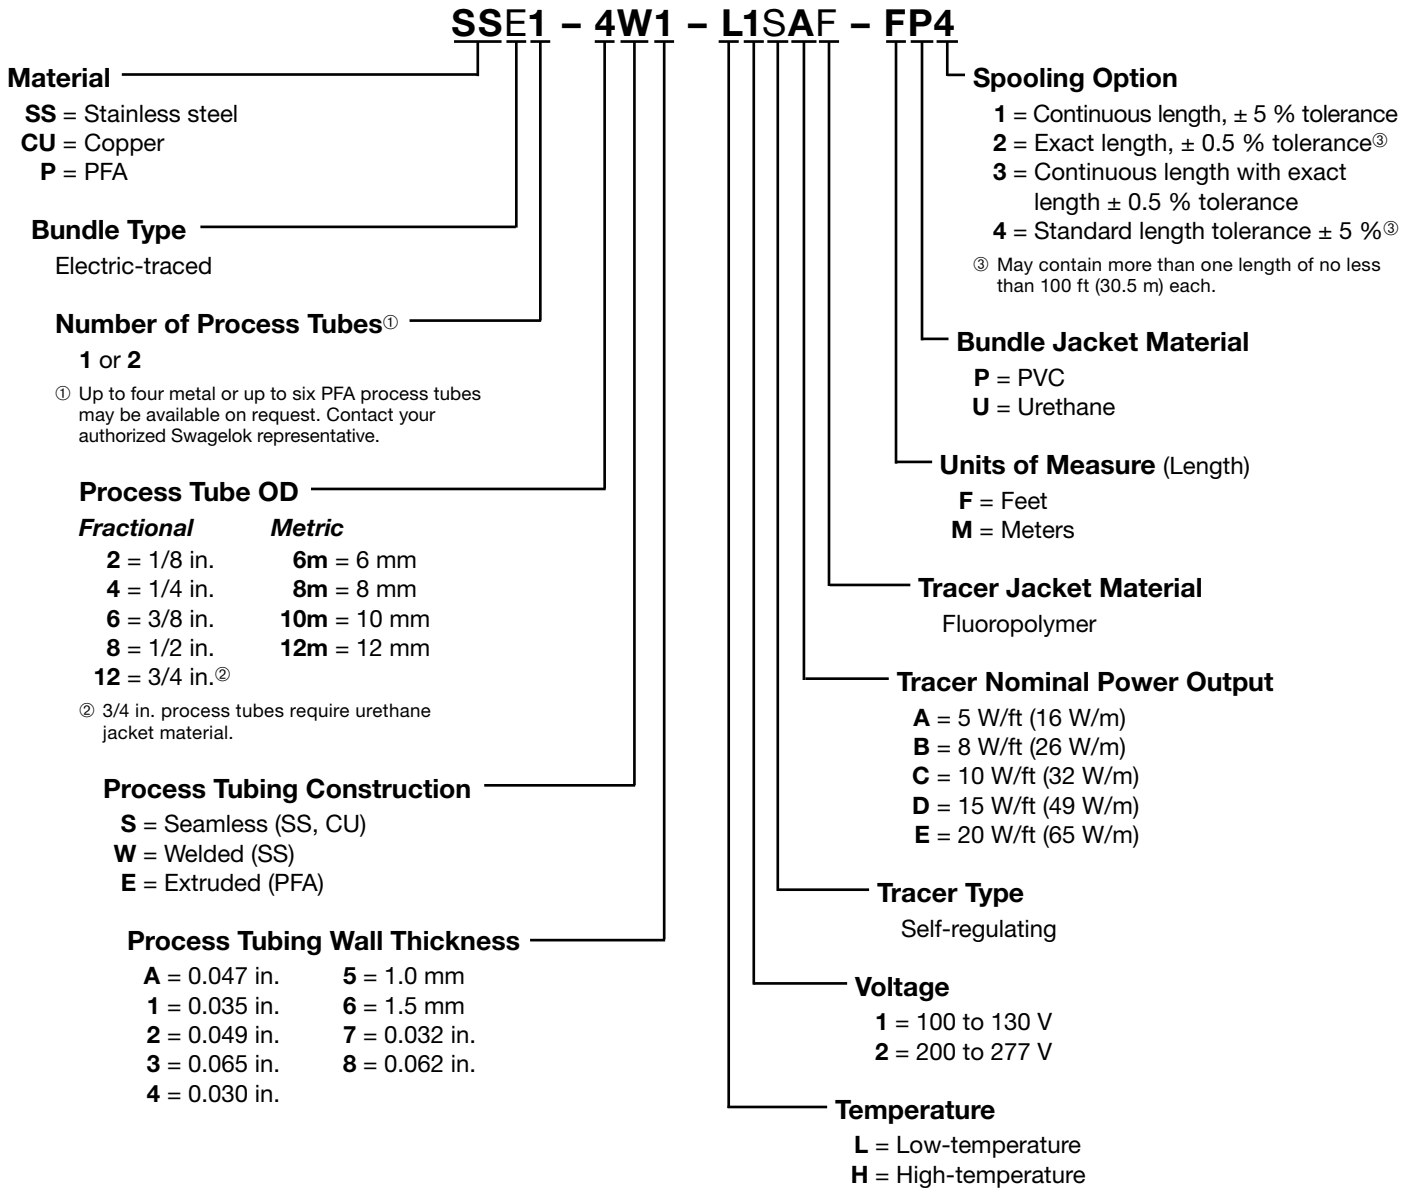

Steam-Traced Bundled Tubing


Light Steam-Traced

Swagelok light steam-traced bundled tubing is typically used for freeze protection of instrument impulse lines and analyzer transport lines. It can also maintain temperatures in smaller-diameter process lines. The process and tracer tubes are individually insulated to reduce the heat transfer rate, providing a more consistent tube temperature over long tubing lengths.


Features

- Maintains process temperatures from 50 to 200°F (10 to 93°C)
- Individually wrapped process and tracer tubes reduce heat transfer
- One or two process tubes available as standard

Dimensions and Weight



One Process Tube



Two Process Tubes



Process Tube Size in.	Tracer Tube Size in.	Dimensions, in. (mm)		Nominal Weight lb/ft (kg/m)
		A	B	
One Process Tube				
3/8	3/8	1.60 (40.6)	1.10 (27.9)	0.5 (0.74)
1/2	3/8	1.90 (48.3)	1.20 (30.5)	0.6 (0.89)
1/2	1/2			0.7 (1.04)
Two Process Tubes				
3/8	3/8	2.30 (58.4)	1.20 (30.5)	0.6 (0.89)
1/2	3/8	2.60 (66.0)	1.30 (33.0)	0.8 (1.19)
1/2	1/2			0.9 (1.34)


Heavy Steam-Traced

Swagelok heavy steam-traced bundled tubing is typically used to maintain higher process temperature or for viscosity control. Applications can include impulse, sampling, and process lines. The process tubing is in direct contact with the tracer, providing maximum heat transfer to help maintain higher process temperatures.


Features

- Maintains process temperatures from 200 to 400°F (93 to 204°C)
- Maximum tracer temperature of 400°F (204°C)
- Process and tracer tubes are in direct contact to maximize higher heat transfer
- One or two process tubes available as standard

Dimensions and Weight



One Process Tube



Two Process Tubes



Process Tube Size in.	Tracer Tube Size in.	Dimensions, in. (mm)		Nominal Weight lb/ft (kg/m)
		A	B	
One Process Tube				
3/8	3/8	1.50 (38.1)	1.20 (30.5)	0.5 (0.74)
1/2	3/8	1.60 (40.6)		0.6 (0.89)
1/2	1/2	1.70 (43.2)		0.7 (1.04)
Two Process Tubes				
3/8	3/8	2.00 (50.8)	1.20 (30.5)	0.6 (0.89)
1/2	3/8	2.10 (53.3)		0.7 (1.04)
1/2	1/2	2.20 (55.9)		0.8 (1.19)

Steam-Traced Bundled Tubing

Ordering Number Reference

This ordering information is for reference only. To order, contact your authorized Swagelok representative.

See page 7 for available process and tracer tubes.

SSL2 - 4S1 - CU4S4 - FP4

Material

- SS** = Stainless steel
- CU** = Copper
- P** = PFA

Bundle Type

- L** = Light traced
- H** = Heavy traced

Number of Process Tubes^①

1 or 2

^① Three metal or up to six PFA process tubes may be available on request. Contact your authorized Swagelok representative.

Process Tube OD

<i>Fractional</i>	<i>Metric</i>
2 = 1/8 in.	6m = 6 mm
4 = 1/4 in.	8m = 8 mm
6 = 3/8 in.	10m = 10 mm
8 = 1/2 in.	12m = 12 mm
12 = 3/4 in. ^②	

^② 3/4 in. process tubes require urethane jacket material.

Process Tubing Construction

- S** = Seamless (SS, CU)
- W** = Welded (SS)
- E** = Extruded (PFA)

Process Tubing Wall Thickness

A = 0.047 in.	5 = 1.0 mm
1 = 0.035 in.	6 = 1.5 mm
2 = 0.049 in.	7 = 0.032 in.
3 = 0.065 in.	8 = 0.062 in.
4 = 0.030 in.	

Spooling Option

- 1** = Continuous length, ± 5 % tolerance
- 2** = Exact length, ± 0.5 % tolerance^③
- 3** = Continuous length with exact length ± 0.5 % tolerance
- 4** = Standard length tolerance ± 5 %^③

^③ May contain more than one length of no less than 100 ft (30.5 m) each.

Bundle Jacket Material

- P** = PVC
- U** = Urethane

Units of Measure (Length)

- F** = Feet
- M** = Meters

Tracer Wall Thickness

1 = 0.035 in.	5 = 1.0 mm
2 = 0.049 in.	6 = 1.5 mm
3 = 0.065 in.	7 = 0.032 in.
4 = 0.030 in.	

Tracer Tube Construction

- S** = Seamless (SS, CU)
- W** = Welded (SS)

Tracer Tube OD

<i>Fractional</i>	<i>Metric</i>
4 = 1/4 in.	6m = 6 mm
6 = 3/8 in.	8m = 8 mm
8 = 1/2 in.	10m = 10 mm
	12m = 12 mm

Tracer Tube Material

- SS** = Stainless steel
- CU** = Copper

Options and Accessories

Bending Tools

Similar to a common electrical conduit bender, this tool is compact and easy to use and has the required 8 or 12 in. (20.3 or 30.5 cm) minimum bend radius. A 3/4 in. NPT threaded handle is needed.



Ordering numbers: **MS-BBT** (8 in. [20.3 cm])
MS-BBT-12 (12 in. [30.5 cm])^①

① Use **MS-BBT-12** when:

- the bundle contains two or more 3/4 in. tubes
- the smallest bundle dimension is >1.75 in. (44.4 mm)
- the bundle contains a tube ≥1 in. (25.4 mm) OD.

Heat-Shrink End-Seal Boots

Made of thermally stabilized, modified polyolefin, these heat-shrink end-seal boots provide a weatherproof end seal. They are recommended for all exposed ends to protect against moisture ingress.



To order, see the table below to locate the proper designator based on process and tracer tube type and size and add it to basic ordering number **MS-HSB-**.

Example: **MS-HSB-D2** for a heavy steam-traced bundle with one 1/4 in. process tube and one 1/4 in. tracer tube

Tracer Tube, in.	Process Tube Sizes, in.				
	1/8	1/4	3/8	1/2	3/4
Electric-Traced					
1 Process Tube					
—	D2	D2	C2	C2	C2
2 Process Tubes					
—	B3	B3	B3	A3	A3
Heavy Steam-Traced					
1 Process Tube					
1/4	D2	D2	D2	D2	C2
3/8	D2	D2	C2	C2	C2
1/2	D2	D2	C2	C2	C2
3/4	C2	C2	C2	C2	L2
2 Process Tubes					
1/4	B3	B3	B3	A3	A3
3/8	B3	B3	B3	A3	A3
1/2	B3	B3	A3	A3	A3
3/4	A3	A3	A3	A3	A3
Light Steam-Traced					
1 Process Tube					
1/4	—	C2	D2	C2	—
3/8		L2	C2	L2	
1/2		L2	L2	L2	
2 Process Tubes					
1/4	—	A3	A3	A3	—
3/8		A3	A3	A3	
1/2		A3	A3	A3	

Jacket Patch Kit

The jacket patch kit can be used to seal a splice in tubing or to repair any incidental field damage to the insulation and jacket. Each kit contains thermal insulation, fiberglass tape, and a self-sealing patch.

Ordering numbers: **MS-JP-KIT-1**
 (8 by 12 in. [20.3 by 30.5 cm])
MS-JP-KIT-2
 (8 by 96 in. [20.3 by 244 cm])

Center Line Tool


This tool brings the process tubes to the proper 2 1/8 in. center line to connect a standard transmitter.



Ordering number:
MS-CLT

Heat-Shrink Entry-Seal Boots

Made of thermally stabilized, modified polyolefin, these heat-shrinkable entry-seal boots provide a waterproof seal where the tubing enters an enclosure.

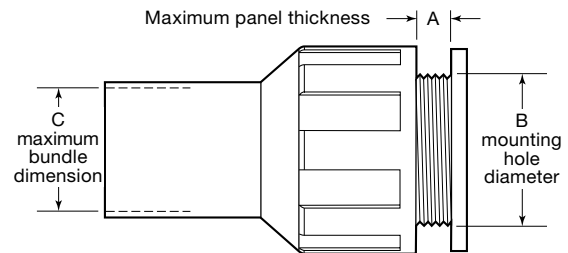

Dimensions, in. (mm)			Ordering Number
A	B	C	
0.50 (12.7)	2.00 (50.8)	0.75 to 1.60 (19.0 to 40.6)	MS-HSS-4-KIT
1.00 (25.4)	2.38 (60.5)	0.75 to 2.10 (19.0 to 53.3)	MS-HSS-4S-KIT
	3.50 (88.9)	1.43 to 2.75 (36.3 to 69.8)	MS-HSS-5-KIT
	4.50 (114)	1.50 to 3.50 (38.1 to 88.9)	MS-HSS-6X-KIT

Silicone Sealant

This silicone RTV sealant can be used to seal ends of bundled tubing from moisture and offers excellent resistance to weather, oil, and many chemicals. One tube will seal approximately 10 ends; each kit contains 8 tubes.

Service Temperature: -60 to 400°F (-51 to 204°C)

Cure Time: approximately 24 h at 77°F (25°C) and 50 % relative humidity.

Ordering number: **MS-RTV-SEAL-KIT**

Options and Accessories

Power Connection Kits

Power connection kits provide a junction for connecting an electric tracer to the power source.

Compatible Tracers	Approvals	Kit Contents	Ordering Number
Low-temperature	FM and CSA Class I, Div. 2, Groups A, B, C, D Class II, Div. 2, Groups F, G Class III UL Class I, Div. 2, Groups A, B, C, D Class II, Div. 2, Groups F, G NEMA 4X	Junction box with surface mounting feet and bundle mounting bracket with adjustable straps	MS-PC-F-C-KIT
High-temperature	FM and CSA Class I, Div. 2, Groups A, B, C, D Class II, Div. 2, Groups F, G Class III NEMA 4X		
All	ATEX Group II, Category 2G, EEx e II	Fitting and seals to connect to customer-supplied junction box with M25 hub	MS-PC-A-KIT

Tracer Termination Kits

Tracer termination kits are used to seal off the tracer end opposite the power connection.

Compatible Tracers	Approvals	Kit Contents	Ordering Number
All	FM and CSA Class I, Div. 2, Groups A, B, C, D Class II, Div. 2, Groups F, G Class III NEMA 4X	Seal housing that is fastened together with two supplied screws	MS-ETT-F-C-KIT
Low-temperature	ATEX Group II, Category 2G, EEx e II	Sleeves to heat shrink onto the tracer	MS-ETT-LT-A-KIT
High-temperature			MS-ETT-HT-A-KIT

Tracer Splice / Tee Connection Kit

The tracer splice/tee kit provides an enclosure to join two or three electric tracers together.

Compatible Tracers	Approvals	Ordering Number
All	FM and CSA Class I, Div. 2, Groups A, B, C, D Class II, Div. 1 and 2, Groups E, F, G Class III NEMA 4X ATEX Group II, Category 2G, EEx e II	MS-ETST-F-C-A-KIT

Options and Accessories

Thermostats

Thermostats with a stainless steel sensor are available to monitor the temperature of the process tubes or monitor the ambient temperature. The set point can be adjusted to control the power to an electric tracer to achieve the desired temperature.



Description	Adjustable Set-Point Temperature °F (°C)	Sensor Exposure Limits °F (°C)	Switch Rating A	Voltage V (ac)	Switch Type	Capillary Length	Approval	Ordering Number
Ambient sensing	15 to 140 (-8 to 60)	-40 to 160 (-40 to 71)	22	125 250 480	SPDT	-	FM, CSA, and UL Class I, Div. 1 and 2, Groups B, C, D Class II, Div. 1 and 2, Groups E, F, G Class III ^① NEMA 4, 7, and 9	MS-AST-F-C
	32 to 120 (0 to 48)	-58 to 131 (-50 to 55)	16	110 230 254			ATEX Group II, Category 2G, EEx emia IIC T6	MS-AST-A
Process line sensing	25 to 325 (-3 to 162)	-40 to 420 (-40 to 215)	22	125 250 480		9 ft (2.7 m)	FM, CSA, and UL Class I, Div. 1 and 2, Groups B, C, D Class II, Div. 1 and 2, Groups E, F, G Class III ^① NEMA 4, 7, and 9	MS-LST-F-C
		-58 to 419 (-50 to 215)		250		3 m (9.84 ft)	ATEX Group II, Category 2G, EEx IIC T6	MS-LST-A

^① Class III does not apply to UL approval.

Tubing Material and Size

Other materials and sizes of tubing and tracers are available. Contact your authorized Swagelok representative.

Additional Products

For information on additional products, see the following Swagelok catalogs:

- *Jacketed Tubing and Insulated Tubing*, MS-02-188
- *Integrated Test Valve Assembly with Universal Mount*, MS-02-221
- *Gaugeable Tube Fittings and Adapter Fittings*, MS-01-140
- *Tubing Data*, MS-01-107.

Safe Product Selection

When selecting a product, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user.

Warranty Information

Swagelok products are backed by The Swagelok Limited Lifetime Warranty. For a copy, visit swagelok.com or contact your authorized Swagelok representative.

Swagelok—TM Swagelok Company
Raychem—Tyco Electronics Corp.
FM—TM FM Global
CSA—TM Canadian Standards Association
UL—Underwriters Laboratories Inc.
© 2004–2010 Swagelok Company
Printed in U.S.A., GLI
June 2010, R4
MS-02-316